


PROJECT	DATE
TYPE	QTY

IP67 Micro Flexible LED Neon

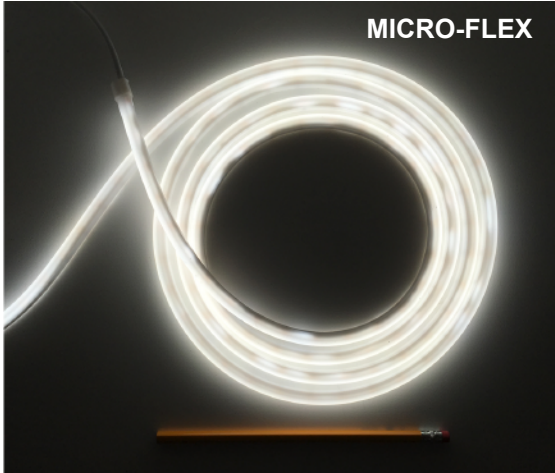

DESCRIPTION:

Impact Lighting's **MICRO-FLEX LED Neon™** can be viewed as a no spot flexible LED Strip in a white PVC jacket.

Perfect for applications such as shelf lighting, architectural accent lighting, glass or acrylic backlighting, showroom and exhibition displays, and much more.



The water resistant **MICRO-FLEX LED Neon** is dimmable.

FEATURES:

- No Visible LED Spots
- 160° View Angle
- Ultra Bright Surface Mount LED's
- CRI 90 or Better
- No RF Interference
- Flexible LED Strip Light on Vertical Axis
- Available in Warm White, Neutral White, Cool White
- Water Resistant - IP67

SPECIFICATIONS

MODEL	IL-MICRO-FLEX
Reel Size	5 Meters (16.4 Feet)
Max Voltage	24 VDC (regulated/Class 2)
Watts Per Meter	12 Watts per Meter
Light Source	300 pcs/Meter (39.37") 2216 SMD LED
Dimensions	5000(L) x 10(W) x 8(H)mm (16.4' x 0.39" x 0.31")
Max Length	5 Meters (16.4 Feet)
View Angle	160°
Brightness	200~250 LM/ft (30.48cm)
Color Temperature	Warm White, Neutral White, Cool White
Lamp Life	30,000 hours (average life)
IP Rating	IP67 (Water Resistant)
Mount	Optional 13mm PVC Channel or included Clips
Operating Temperature	-25°C ~ +40°C (-13°F ~ 104°F)

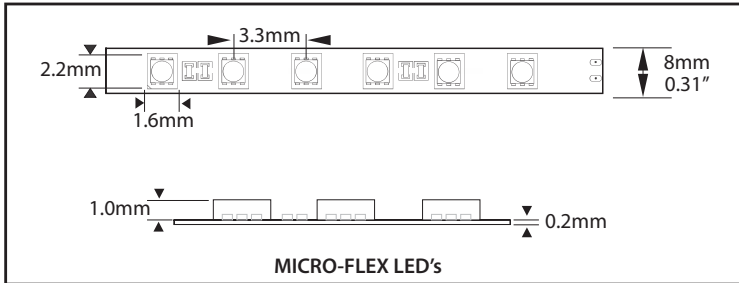

ORDERING Example: IL-MICRO-FLEX-NW Micro Flex Led Neon with Neutral White LED (shown in image above)

MODEL	LED
MICRO-FLEX	
Micro Flex LED Neon Series 5M Reel (16.4 Ft.)	WW - Warm White (2500-2600K) NW - Neutral White (3400-3500K) CW - Cool White (5000-5200K)

IMPACT LIGHTING

2101 West Central Blvd. Orlando, Florida 32805 USA • Phone: 1.800.507.5714 • Email: sales@impactlightinginc.com

www.impactlightinginc.com